


SIDE VIEW

A-2 HARDWARE QUANTITY TABLE

SIGN LENGTH	SIGN DEPTH See Note 3	UNITS REQUIRED See Note 5
14'-0" or less	4'-2" - 5'-0"	9
15'-0" - 24'-0"	4'-2" - 5'-0"	13
20'-0" - 24'-0"	4'-2" - 5'-0"	13
14'-0" or less	5'-10" - 10'-0"	17
15'-0" - 24'-0"	5'-10" - 10'-0"	25
20'-0" - 24'-0"	5'-10" - 10'-0"	26

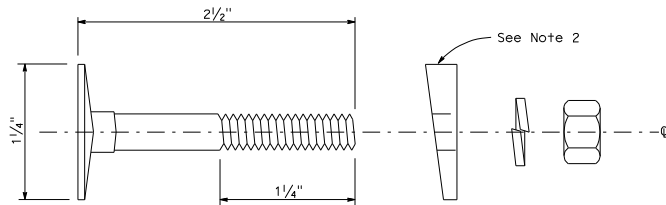

MOUNTING HARDWARE

## NOTES:

1. Refer to applicable Standard Plan for additional mounting details.
2. Beveled washer for tapered flange only.
3. Elevator head bolt, hexagon nut, and lock washer shall be  $\frac{5}{16}$ " diameter (18-8) stainless steel.
4. Furnish retroreflective stick-ons for bolt head in same color as sign. Retroreflective stick-ons are applied at time of installation.
5. One unit of A-2 hardware shall consist of one each; bolt nut, washer and beveled washer.
6. Signs 9'-2" and 10'-0" in depth may be fabricated in three panel sections to avoid legend from being placed on a horizontal seam. Increase number of units of mounting hardware accordingly.


STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**TYPE A-2 MOUNTING HARDWARE  
OVERHEAD LAMINATED  
TYPE A PANEL  
BRIDGE MOUNTED AND  
TUBULAR SIGN STRUCTURES**

NO SCALE

**S88**

DIST.	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS

  
 REGISTERED CIVIL ENGINEER

May 1, 2006  
 PLANS APPROVAL DATE

The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.

To get to the Caltrans web site, go to: <http://www.dot.ca.gov>

